




**WASHER SERIE 003-32**



- Made from nylon-6 (PA-6) or PVC
- Colour: natural, black
- The anti loss lip (F) is suitable for pre assembly
- Sizes also in DIN 9021 and ISO 7093
- Resistant to corrosion and many chemicals
- Also available in assortment box 019
- Check our extensive ranges of nylon or metal screws and nuts

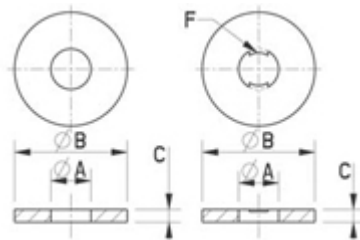

**Dimensions**

Dimensions in mm

Article number	Colour	A	B	C	D	E	F
032 0301 000 01		3.2	9	0.8	9021	7093	
032 0300 000 01		3.2	9	1.5			F
032 0300 114 07	■	3.2	9	1.5			F
032 0401 000 01		4.3	12	1	9021	7093	
032 0400 000 01		4.3	12	1.4			F
032 0400 114 07	■	4.3	12	1.4			F
032 0500 000 01		5.3	15	1.5	9021	7093	F
032 0500 114 07	■	5.3	15	1.5	9021	7093	F
032 0501 000 01		5.3	15	1.5	9021	7093	
032 0600 000 01		6.4	18	2	9021	7093	F
032 0600 114 07	■	6.4	18	2	9021	7093	F
032 0601 000 01		6.4	18	2	9021	7093	
032 0800 000 01		8.4	25	2.5	9021	7093	
032 0800 114 07	■	8.4	25	2.5	9021	7093	
032 1000 000 01		10.5	30	3	9021	7093	F
032 1000 114 07	■	10.5	30	3	9021	7093	F
032 1001 000 01		10.5	30	3	9021	7093	
032 1200 000 01		13	40	3	9021	7093	F
032 1200 114 07	■	13	40	3	9021	7093	F
032 1201 000 01		13	40	3	9021	7093	

**QUALITY PRODUCTS - EXCELLENT SERVICE - SMART DELIVERIES!**



**ARTIUM ITC OÜ**

[info@artium.ee](mailto:info@artium.ee)

+372 7409 400

**AB TRANSYSTEMS SIA**

[info@abtransystems.lv](mailto:info@abtransystems.lv)

+371 6714 0102

*Furniture*

**Washers and rings**

**Colour:**

Colour description : natural, jet black



Matches

: Milk-like transparent white colour can differ per kind of material, reasonably matches RAL colour 9005 and TRESPA A90.0.0

Featured colours reserved. Due to the screen differences in colour may occur.

**Material:**

Nylon-6 (PA-6)

**Material number:**

01

**General information**

A strong, tough and durable material. Suitable for connecting elements and other technical components. Thanks to self lubricant properties ideal for slide bearings. Always has to acclimatize for a few days after injection moulding, taking approximately 3% moisture to obtain its normal strength. Operational temperature can go up to 100-120°C temporarily for non-critical parts. Many nylons are self extinguishing.

---

QUALITY PRODUCTS - EXCELLENT SERVICE - SMART DELIVERIES!

[www.artium.ee](http://www.artium.ee)

[www.abtransystems.lv](http://www.abtransystems.lv)