




LOCKING PCB SPACER SERIE 100-0



- Made from nylon-66 (PA-66)
- Colour: natural
- Easy fastening with snap fitting, no tools or screws needed
- Rapidly detachable
- Supports relatively high weights
- Also available in assortment box (group 019)

Dimensions

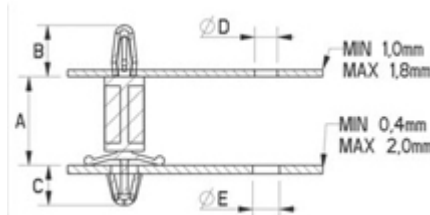

Dimensions in mm

Article number	Colour	A	B	C	D	E
100 0350 000 02		4.8	9	8	4.0	4.7
100 0352 000 02		6.4	9	8	4.0	4.7
100 0354 000 02		7.9	9	8	4.0	4.7
100 0356 000 02		9.5	9	8	4.0	4.7
100 0358 000 02		11.1	9	8	4.0	4.7
100 0360 000 02		12.7	9	8	4.0	4.7
100 0362 000 02		14.3	9	8	4.0	4.7
100 0364 000 02		15.9	9	8	4.0	4.7
100 0366 000 02		17.5	9	8	4.0	4.7
100 0368 000 02		19.1	9	8	4.0	4.7
100 0370 000 02		20.6	9	8	4.0	4.7
100 0372 000 02		22.2	9	8	4.0	4.7
100 0374 000 02		23.8	9	8	4.0	4.7
100 0376 000 02		25.4	9	8	4.0	4.7
100 0378 000 02		27.0	9	8	4.0	4.7
100 0380 000 02		28.6	9	8	4.0	4.7
100 0382 000 02		30.2	9	8	4.0	4.7

Colour:

natural

Colour number:

000

Colour description : natural



QUALITY PRODUCTS - EXCELLENT SERVICE - SMART DELIVERIES!



ARTIUM ITC OÜ

info@artium.ee

+372 7409 400

AB TRANSYSTEMS SIA

info@abtransystems.lv

+371 6714 0102

Furniture
PCB Spacers

Matches : Milk-like transparent white colour can differ per kind of material.
Featured colours reserved. Due to the screen differences in colour may occur.

Material:

Nylon-66 (PA-66)

Material number:

02

General information

A strong, tough and durable material. Suitable for connecting elements and other technical components. Thanks to self lubricant properties ideal for slide bearings. Always has to acclimatize for a few days after injection moulding, taking approximately 3% moisture to obtain its normal strenght. Operational temperature can go up to 100-120°C temporarily for non-critical parts. Many nylons are self extinguishing.

QUALITY PRODUCTS - EXCELLENT SERVICE - SMART DELIVERIES!

www.artium.ee

www.abtransystems.lv